



SILVERSTONE[®]
Designing Inspiration

RLO7

REDLINE SERIES



SOLID METAL
FRONT PANEL DESIGN



- Stunning exterior styling with fine lighting details
- Super clean internal look with PSU and drive bay cover
- Quick access filters for easy cleaning
- Smart backside cable routing design
- Motherboard back plate opening for quick CPU cooler assembly
- Supports graphics cards up to 16.3" (415mm)
- Full tempered-glass side panel

Introduction

SilverStone's Redline RL07 is a tower chassis with spectacular front panel design mated to a functional and practical internal structure. It has audacious, one of a kind asymmetrical styling that pays homage to earlier aggressive Redline series chassis launched in 2012 but elevates with details often only available on cases costing much more. On the inside, the RL07 has many modern features such as power supply / drive shroud, convenient tool-less drive trays, quick access dust filter and smart backside cable routing design. So it not only has highly flexible space for installing all popular core components, it also has incredible support for a myriad of cooling configurations. There are four total 120 / 140mm fan slots around the case with maximum radiator support of up to 360mm to meet the needs of PC enthusiasts of all levels.

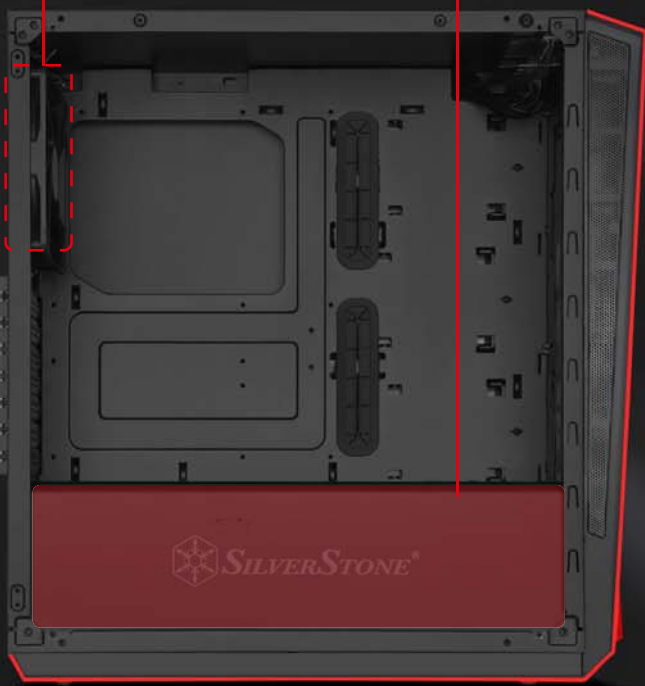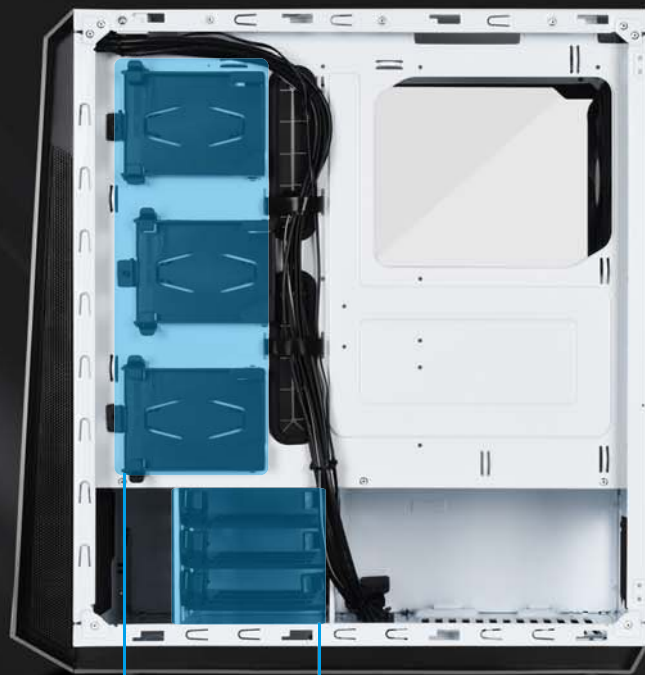

Super clean internal look with PSU and drive bay cover

Specifications

Model No.	SST-RL07B-G (black + red led + tempered glass window) SST-RL07W-G (white + blue led + tempered glass window)
Material	Steel front panel, steel body, tempered glass side panel
Motherboard	ATX (up to 12" x 11") , Micro ATX
Drive Bay	Internal 3.5" x 3 (compatible with 2.5") , 2.5" x 3
Cooling System	Front 3 x 120 / 140mm fan slot Rear 1 x 120 / 140mm fan slot (1 x 140mm exhaust fan included)
Radiator support	Front 120mm x 1 : 240mm / 280mm / 360mm x 1 Rear 120mm / 140mm x 1
Expansion Slot	7
Front I/O Port	USB 2.0 x 2, USB 3.0 x 2, Audio x 1, MIC x 1
Power Supply	Optional PS2 (ATX)
Expansion Card	Compatible up to 16.3" (415mm) in length, width restriction —6.57" (167mm)
Limitation of CPU cooler	167mm
Limitation of PSU	140 ~ 200mm*
Net Weight	8.2 kg
Dimension	226mm (W) x 488mm (H) x 465mm (D), 51.2 Liters

* Depend on drive cage's position.

Taiwan Headquarters

12F., No.168, Jiankang Rd.,
Zhonghe Dist., New Taipei City 235,
Taiwan R.O.C.
Tel: + 886-2-8228-1238 / Fax: + 886-2-8228-7123
For sales and purchasing: sales@silverstonetek.com

USA

13626 Monte Vista Ave. Unit #A,
Chino, CA 91710,
USA
Tel: + 1-909-465-9596 / Fax: + 1-909-465-9569
For General Questions/Sales: usasales@silverstonetek.com

Europe

Brandstücken 27,
D-22549 Hamburg,
Germany
Tel: + 49-40-675931-0 / Fax: + 49-40-675931-66
For sales and purchasing: sales.eu@silverstonetek.de