



SILVERSTONE[®]
Designing Inspiration

NIGHTJAR SERIES
SST-ST45NF

**Optimum fan-less power supply
with stability and silence**

SPECIFICATION

SilverStone Nightjar ST45NF ATX12V 2.3 Switching Power Supply With Active PFC PS/2 450W

1. General

This specification describes the electrical characteristics, functional and physical of a PS/2 Fanless Switching power supply; the maximum output shall be 450W when Input Voltage is from 100V to 240V. This power supply is also design with Active PFC (Power Factor Correction) capabilities.

2. AC Input Characteristics

2.1. AC Input Voltage, Frequency and Current (Rating: 100V-240Vac, 47-63Hz, 6-3A)

The power supply must operate within all specified limits over the input voltage range in Table 1.

Harmonics distortion of up to 10% THD must not cause the power supply to go out of specified limits.

Parameter	Minimum	Rated	Maximum	Maximum Input Current
Voltage (115V)	99 Vac	100-127Vac	132 Vac	6 A
Voltage (230V)	180 Vac	200-240Vac	264Vac	3.5 A
Frequency	47 Hz	50 / 60 Hz	63 Hz	-

Table 1 - AC Input Voltage and Frequency

2.2. AC Input Current and Inrush Current

AC input current of the system shall meet the limits shown in Table 1. No damage shall occur or overstress input fuse shall blow (as a result of inrush). Under conditions; 132/264VAC full load turn off 1sec; turn on at peak of input voltage cycle 25°C air ambient cold start.

2.3. Input Power Factor Correction (Active PFC)

The power factor at full load shall be ≥ 0.95 at nominal input voltage.

2.4. Input Current Harmonics

When the power supply is operated in 99-264Vac of Sec. 2.1, the input harmonic current drawn on the power line shall not exceed the limits set by EN61000-3-2 class "D" standards. The power supply shall incorporate universal power input with active power factor correction.

2.5. AC Line Dropout

An AC line dropout of 20mS or less shall not cause any tripping of control signals or protection circuits. If the AC dropout lasts longer than 20mS the power supply should recover and meet all turn on requirements. The power supply shall meet the regulation requirement over all rated AC voltages, frequencies, and output loading conditions. Any dropout of the AC line shall not cause damage to the power supply. An AC line dropout is defined as a drop in AC line to 0VAC at any phase of the AC line for any length of time.

2.6. AC Surge Voltages

The power supply shall be tested and be compliant with the requirements of IEC61000-4-5 Level 3 criteria for surge withstand capability, with the following conditions and exceptions. The test equipment and calibrated waveforms shall comply with the requirements of IEC61000-4-5 for open circuit voltage and short circuit current.

- ▶ These input transients must not cause any out of regulation conditions, such as overshoot and undershoot, nor must it cause any nuisance trips of the power supply protection circuits.
- ▶ The surge-withstand test must not produce damage to the power supply.
- ▶ The power supply must meet surge-withstand test condition under maximum and minimum DC output load conditions.

2.7. Surge Immunity, IEC61000-4-5

The peak value of the unidirectional surge waveform shall be 2KV for common mode and 1KV for differential mode of transient surge injection. No unsafe operation or no user noticeable degradation is allowed under any condition. Automatic or manual recovery is allowed for other conditions.

2.8. Electrical Fast Transient / Burst, IEC61000-4-4

No unsafe operation allowed under any condition. No user noticeable performance degradation up to 1KV is allowed. Automatic or manual recovery is allowed for other conditions.

2.9. Electro Static Discharge, IEC61000-4-2

In addition to IEC61000-4-2, the following ESD tests should be conducted. Each surface area of the unit under test should be subjected to twenty (20) successive static discharges, at each of the follow voltages: 2KV, 3KV, 4KV, 5KV, 6KV and 8KV.

All power supply outputs shall continue to operate within the parameters of this specification, without glitches or interruption, while the power is operating as defined and subjected to 2kV through 10kV ESD pulses. The direct ESD event shall not cause any out of regulation conditions such as overshoot or undershoot. The power supply shall withstand these shocks without nuisance trips of the Over-Voltage Protection, Over-Current Protection, or the remote +5VDC, +12VDC shutdown circuitry.

2.10. Radiated Immunity, IEC61000-4-3

Frequency	Electric Field Strength
27 MHz to 500 MHz, un-modulated	3 V/m

3. DC Output Specification

3.1. Output Current / Loading

The following tables define two power and current rating. The power supply shall meet both static and dynamic voltage regulation requirements for minimum load condition.

400W/25°C at 99Vac ~264Vac

Output Voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. Load	20A	14A	32A	0.5A	2.5A
Min. Load	0A	0A	0.5A	0A	0A
Peak Power	0A	0A	36A	0A	3.5A

Table 5 - High Load Range 1

Note 1: The +5 & +3.3 Volt total output shall not exceed 130 W.

Note 2: The +5, +3.3 & +12Volt total output shall not exceed 394W.

Note 3: Maximum continues total DC output power should not exceed 400W

Note 4: Peak Power should not exceed 450W

450W /25°C at 180Vac ~264Vac

Output Voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. Load	22A	15A	35A	0.5A	2.5A
Min. Load	0A	0A	0.5A	0A	0A
Peak Power	0A	0A	40A	0A	3.5A

Table 5 - High Load Range 1:

Note 1: The +5 & +3.3 Volt total output shall not exceed 130 W.

Note 2: The +5, +3.3 & +12Volt total output shall not exceed 430W.

Note 3: Maximum continues total DC output power should not exceed 450W

Note 4: Peak Power should not exceed 500W

3.2. DC Voltage Regulations, Ripple and Noise

The power supply output voltages must stay within the following voltage limits when operating at steady state and dynamic loading conditions. All outputs are measured with reference to the return remote sense (ReturnS) signal. The +5V,+12V, -5V,-12V and +5VSB outputs are measure at the power supply connectors references to ReturnS. The +5V and +3.3V is measured at its remote sense signal (+5VS+, +3.3VS+) located at the signal connector.

Output Voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. Load	+5%/-5%	+5%/-5%	+5%/-5%	+10%/-10%	+5%/-5%
Min. Load	± 1%	± 1%	± 1%	± 1%	± 1%
Peak Power	50mV	50mV	120mV	120mV	50mV

Table 7 - Regulation, ripple and noise

Ripple and noise shall be measured using the following methods:

- (a) Measurements made differentially to eliminate common-mode noise
- (b) Ground lead length of oscilloscope probe shall be ≤ 0.25 inch.
- (c) Measurements made where the cable connectors attach to the load.
- (d) Outputs bypassed at the point of measurement with a parallel combination of 10uF tantalum capacitor in parallel with a 0.1uF ceramic capacitors.
- (e) Oscilloscope bandwidth of 0 Hz to 20MHz.
- (f) Measurements measured at locations where remote sense wires are connected.
- (g) Regulation tolerance shall include temperature change, warm up drift and dynamic load

3.3. Dynamic Loading

The output voltages shall remain within the limits specified in Table 7 for the step loading and within the limits specified in Table 8 for the capacitive loading. The load transient repetition rate shall be tested between 50Hz and 5kHz at duty cycle ranging from 10%-90%. The load transient repetition rate is only a test specification. The Δ step load may occur anywhere within the MIN load to the MAX load shown in Table 5 and Table 6.

Output	Δ Step Load Size	Load Slew Rate	Capacitive Load
+5V	30% of Max. Load	0.5 A/ μ S	1000 μ F
+3.3V	30% of Max. Load	0.5 A/ μ S	1000 μ F
+12V	50% of Max. Load	0.5 A/ μ S	2200 μ F
+5VSB	50% of Max. Load	0.5 A/ μ S	1 μ F

Table 8 - Transient Load requirements

3.4. Capacitive Loading

The power supply shall be stable and meet all requirements, except dynamic loading requirements, with the following capacitive loading ranges.

Output	MIN	MAX	Units
+5V	10	12,000	μ F
+3.3V	10	12,000	μ F
+12V	10	11,000	μ F
-12V	1	350	μ F
+5VSB	1	350	μ F

Table 9 - Capacitive Loading Conditions

3.5. Timing Requirements

These are the timing requirements for the power assembly operation. The output voltages must rise from 10% to within regulation limits (T_{vout_rise}) within 5 to 200mS. The +5V, +3.3V and +12V output voltages should start to rise at about the same time. All outputs must rise monotonically. The +5V output needs to be greater than the +3.3V output during any point of the voltage rise. The +5V output must never be greater than the +3.3V output by more than 2.25V. Each output voltage shall reach regulation within 50 mS (T_{vout_on}) of each other during turn on of the power supply. Each output voltage shall fall out of regulation within 400 mS (T_{vout_off}) of each other during turn off. Figure 1 and figure 2 show the turn On and turn Off timing requirement. In Figure 2, the timing is shown with both AC and PSON# controlling the On/Off of the power supply.

Item	Description	MIN	MAX	Units
T_{vout_rise}	Output voltage rise time from each main output	0.1	20	mS
T_{vout_rise}	All main output must be within regulation of each other within this time.	--	50	mS
T_{vout_rise}	All main output must leave regulation within this time	--	400	mS

Table 10 - Output Voltage Timing

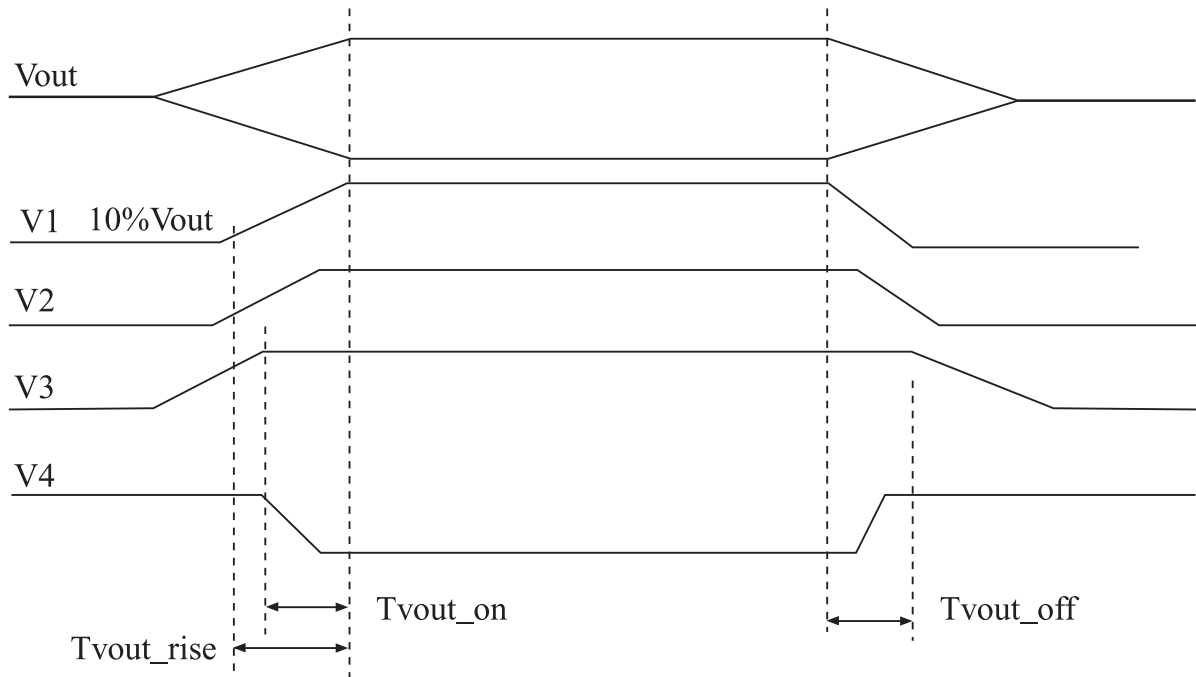


Figure 1 : Output Voltage Timing

Item	Description	MIN	MAX	Units
Tsb_on-delay	Delay from AC being applied to +5VSB being within regulation.	-	1500	mS
Tac_on-delay	Delay from AC being applied to all output voltages being within regulation.	-	2500	mS
Tvout_holdup	Time all output voltage stay within regulation after loss of AC at 115V and 230Vac, Full load.	17	-	mS
Tpwok_holdup	Delay from loss of AC desertsions of Power_OK at 115Vac and 230Vac, Full load	16	-	mS
Tpson_on_delay	Delay from PSON# active to output voltage within regulation limits.	5	400	mS
Tpson_pwok	Delay from PSON# deactive to PWOK being deasserted.	-	50	mS
Tpwok_on	Delay from output voltage within regulation limits to PWOK asserted at turn on.	100	500	mS
Tpwok_off	Delay from PWOK deserted to output voltages (+5V, +3.3V, +12V, -12V) dropping out of regulation limits.	1	-	mS
Tpwok_low	Duration of PWOK being in the deserted state during an off/on cycle using AC or the PSON# signal. .	100	-	mS
Tsb_vout	Delay from +5VSB being in regulation to O/Ps being in regulation at AC turn on.	50	1000	mS

Table 11 - Turn On/Off Timing

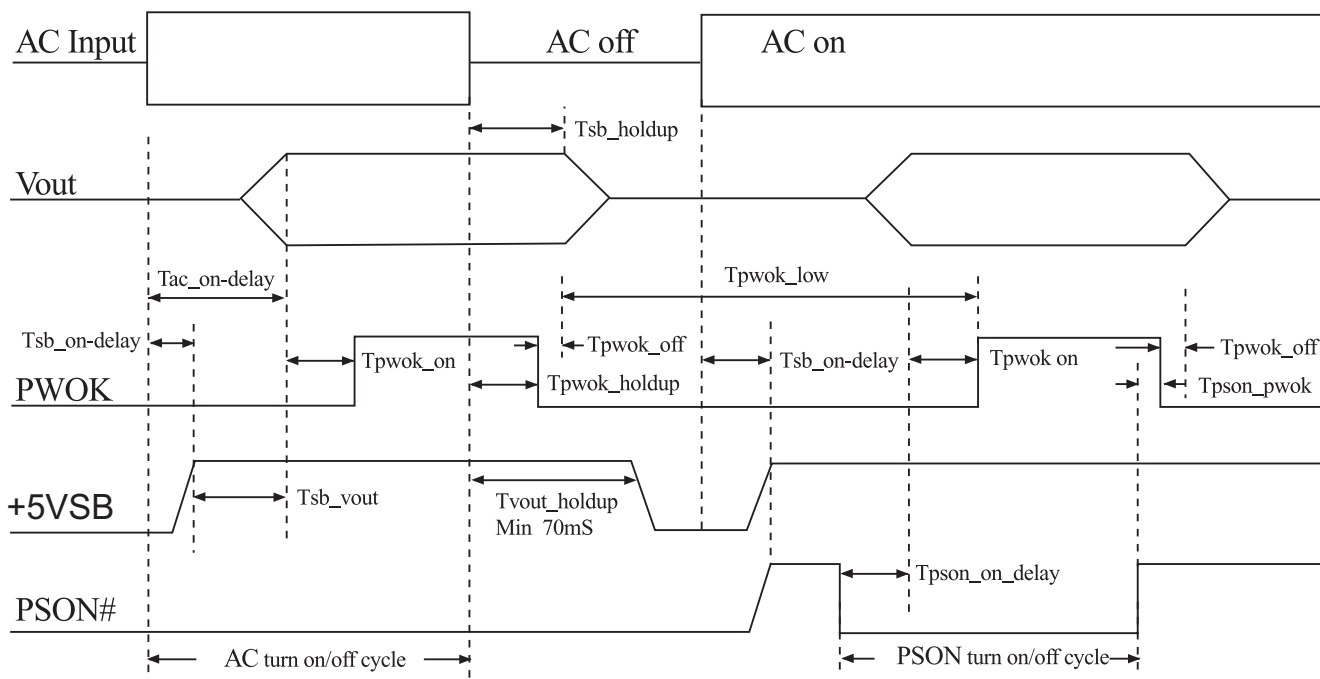


Figure 2 : Turn On/Off Timing

3.6. Power Good Signal : PWOK

PWOK is a power OK signal and will be pulled HIGH by the power supply to indicate that all the outputs are within the regulation limits of the power supply. When any output voltage falls below regulation limits or when AC power has been removed for a time sufficiently long so that power supply operation is no longer guaranteed, PWOK will be deserted to a LOW state. See for a representation of the timing characteristics of PWOK. The start of PWOK delay time shall inhibited as long as any power supply output is in current limit.

Signal Type	Open collector/drain output from power supply. Pull-up to VSB located in power supply.	
PWOK = High	Power OK	
PWOK = Low	Power is Not OK	
-	MIN	MAX
Logic level low voltage, Isink = 4mA	0V	0.4V
Logic level high voltage, Isource = 200µA	2.4V	5.25V
Sink current, PWOK = Low	-	4mA
Source current, PWOK = High	-	2mA
PWOK delay: Tpwok_on	100mSec	500mSec
PWOK rise and fall time	-	100µSec
PWOK down delay : Tpwok_off	2mSec	200mSec

Table 12 - PWOK Signal Characteristics

3.7. Remote On/Off Control : PSON#

The PWON# signal is required to remotely turn on/off the power supply. PSON# is an active low signal that turns on the +5V, +3.3V, +12V and -12V power rails. When this signal is not pulled low by the system, or left open, the outputs (except the +5VSB and Vbias) turn off. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply.

Signal Type	Accepts an open collector/drain input from the system. Pull-up to VSB locted in power supply.	
PSON# = Low	Power ON	
PSON# = Open	Power OFF	
-	MIN	MAX
Logic level low (Power supply ON)	0V	0.8V
Logic level low (Power supply OFF)	2.0V	5.25V
Source current, Vpson = Low	-	4mA
Power up delay: Tpson_on_delay	5mSec	400mSec
PWOK delay : Tpson_pwok	-	50mSec

Table 13 - PWOK Signal Characteristics

3.8. Overshoot at Turn-on /Turn-off

Any output overshoot at turn on shall be less than 10% of the nominal output value. Any overshoot shall recover to within regulation in less than 10ms.

3.9. Efficiency

The minimum power supply system efficiency shall be $\geq 80\%$, measured at nominal input voltage 115 V or 230 V and full loading.

3.10. +5VSB (Standby)

The +5VSB output is always on (+5V Standby) when AC power is applied and power switch is turned on and the +5VSB line is capable of delivering at a maximum of 1.5A for PC board circuit that power supply is in standby mode. The maximum output current of 5Vsb shall be 2.5A that power supply is in powered-on mode.

4. Protection

Protection circuits inside the power supply shall cause only the power supply's main outputs to shutdown. If the power supply latches off due to a protection circuit tripping, either a AC cycle OFF for 15 sec, or PSON# cycle HIGH for 1 sec must be able to restart the power supply.

4.1. Over Current Protection

This power supply shall have current limit to prevent the +5V, +3.3V, and +12V outputs from exceeding the values shown in table 14. The current limit shall not trip under maximum continuous load or peak loading as described in Table 5. The power supply shall latch off if the current exceeds the limit. The latch shall be cleared by toggling the PSON# signal or by cycling the AC power. The power supply shall not be damaged from repeated power cycling in this condition. The -12V and +5VSB outputs shall be shorted circuit protected so that no damage can occur to the power supply.

Voltage	Minimum	Maximum	Shutdown Mode
+5V	110%	150%	Latch Off
+3.3V	110%	150%	Latch Off
+12V	110%	150%	Latch Off

Table 14 -Over Current protection

4.2. Over Voltage Protection

The power supply shall shut down in a latch off mode when the output voltage exceeds the over voltage limit shown in Table 4.

Voltage	Minimum	Maximum	Shutdown Mode
+5V	+5.6V	+6.5V	Latch Off
+3.3V	+3.8V	+4.5V	Latch Off
+12V	+13.2V	+14.5V	Latch Off

Table 15 -Over Voltage protection

4.3. Short Circuit Protection

The power supply shall shut down in a latch off mode when the output voltage is short circuit except 5Vsb.

4.4. No Load Operation

When the primary power is applied, with no load on any output voltage, no damage or hazardous conditions shall occur.

5. Environmental Requirements

5.1. Temperature

Operating Temperature Range	0°C ~ 25°C (32°F~ 75°F)
Non-Operating Temperature Range	-40°C ~ 70°C (-40°F~ 158°F)

5.2. Humidity

Operating Humidity Range	20% ~ 90%RH non-condensing
Non-Operating Humidity Range	5% ~ 95%RH non-condensing

5.3. Altitude

Operating Altitude Range	Sea level to 10,000 ft
Non-Operating Altitude Range	Sea level to 40,000 ft

5.4. Mechanical Shock

The power supply shall not be damaged during a shock of 50G with an 11 mS half sin wave, non-operating. The shock test shall be applied in each of the orthogonal axes.

5.5. Vibration

The power supply shall be subjected to a vibration test consisting of a 10 to 300 Hz sweep at a constant acceleration of 2.0g for duration of one (1) hour for each of the perpendicular axes X, Y and Z, 0.1 octave/minute. The output voltages shall remain within specification.

6. Agency Requirements

6.1. Safety Certification

Product Safety	UL 60950-1, IEC60950 TUV, BSMI ,CCC
RFI Emission	FCC Part15 (Radiated & Conducted Emissions) CISPR 22,3rd Edition/ EN55022 Class B)
PFC Harmonic	EN 61000-3-2
Flicker	EN 61000-3-3
Immunity against: -Electrostatic discharge: -Radiated field strength: -Fast transients: -Surge voltage: -RF Conducted -Voltage Dips and Interruptions	EN55024: 1998 -IEC 61000-4-2 Min. 4kV contact discharge Min. 8kV air discharge -IEC 61000-4-3 Min. 10V/m -IEC 61000-4-4 Min 2kV AC input lines Min 1kV on data lines -IEC 61000-4-5 Min 2kV common mode Min 1kV differential mode -IEC 61000-4-6 -IEC 61000-4-11

However the unit is allowed to exceed the limits for conducted emissions of the above specification in the frequency range 150KHz to 1Mhz. A "Golden Unit" will be provided by Stratus as a reference. This Gold Unit is a unit which has been modified and tested by Stratus. Production units shall not exceed the limits of the Gold Unit by more than 5dB in the frequency range 150Khz to 1Mhz.

6.2. AC Input Leakage Current

Input leakage current from line to ground will be less than 3.5mA rms. Measurement will be made at 240 VAC and 60Hz.

6.3. Production Line Testing

100% of the power supply production must have the following test performed. Each power shall be marked indicating the testing was done and passed. Typically this is done by stamping or labeling the power supply with "Hi-pot test OK".

6.4. Hi-Pot Testing

Each power supply must be Hi-pot tested according UL and TUV requirements, Minimum typical testing voltage for Hi-pot testing are 1500Vac or 2121Vdc. However depending on the power supply design the testing voltage May be higher. If higher the power supplies shell be at the higher value.

6.5. Ground Continuity Testing

UL and TUV require that each power supply ground is tested, to ensure there is continuity between the ground inlet of the power supply and the power supply chassis. This can be performed with an ohm meter, or an electronic circuit that lights up and illustrates the ground has continuity. Based on EN50116, ERG or TUV require that each power supply ground id tested with a 25Amp ground test.

7. Reliability

7.1. Mean Time Between failures (MTBF)

The MTBF of the power supply shall be calculated utilizing the Part-Stress Analysis method of Bellcore

MIL217F. The calculated MTBF of the power supply shall be greater than 100,000 hours under the following conditions:

- (a) Full rated load, (b) 120V AC input, (c) Ground Benign; (d) 25°C

8. LED Indicators & Connections

8.1. LED Indicators

There are two LEDs for the monitoring the status of the power supply, which allows users to perceive a full awareness of the working condition of the power supply.

The temperature-LED indicates surface temperature of the power supply's housing cage.

[CAUTION: DO NOT TOUCH THE SURFACE OF POWER SUPPLY WHEN THE TEMP.-LED INDICATES YELLOW, IT MIGHT BE DANGEROUS.]

Temp. Status	LED Color
High $\geq 55^{\circ}\text{C}$	Yellow
Low $\leq 55^{\circ}\text{C}$	Green

Configure 8-1-1

The Status-LED indicates power supply' working

Power Status	LED Color
Standby	Amber
Power ON	Green
Power Fault	Red

Configure 8-1-2

8.2. AC Input Connector

The AC input receptacle shall be an IEC 320 type or equivalent. The IEC 320 C receptacle will be considered the mains disconnect.

8.3. DC Wire Harness and Connector Requirements

ATX Motherboard Power Connector

Physical Characteristics Size

9. Physical Characteristics Size

9.1. Weight: 2.8Kg (TBD)

9.2. Power Supply Dimension: 150mm(W) x 86mm(H) x 160mm(D)

9.3. Connectors (Pin definition)

M/B 24PIN connector

18AWG wire	Signal	Pin	Pin	Signal	18AWG wire
Orange	+3.3V	13	1	+3.3V	Orange
Orange(22AWG)	+3.3Vsense	13			
Blue (18AWG)	-12VDC	14	2	+3.3V	Orange
Black	COM	15	3	COM	Black
Green(18AWG)	PS-ON	16	4	+5VDC	Red
Black	COM	17	5	COM	Black
Black	COM	18	6	+5VDC	Red
Black	COM	19	7	COM	Black
White	N/C	20	8	PWRGOOD	Grey (18AWG)
Red	+5VDC	21	9	+5Vsb	Purple
Red	+5VDC	22	10	+12VDC	Yellow
Red (22AWG)	+5Vsense	22			
Red	+5VDC	23	11	+12VDC	Yellow
Black	COM	24	12	+3.3V	Orange

M/B 20PIN connector (M/B 20+4PIN in split mode)

18AWG wire	Signal	Pin	Pin	Signal	18AWG wire
Orange	+3.3V	13	1	+3.3V	Orange
Orange(22AWG)	+3.3Vsense	13			
Blue (18AWG)	-12VDC	14	2	+3.3V	Orange
Black	COM	15	3	COM	Black
Green(18AWG)	PS-ON	16	4	+5VDC	Red
Black	COM	17	5	COM	Black
Black	COM	18	6	+5VDC	Red
Black	COM	19	7	COM	Black
White	N/C	20	8	PWRGOOD	Grey (18AWG)
Red	+5VDC	21	9	+5Vsb	Purple
Red	+5VDC	22	10	+12VDC	Yellow
Red (22AWG)	+5Vsense	22			

SilverStone Technology Co., Ltd.

www.silverstonetek.com

support@silverstonetek.com

Issue date: February, 2008

NO:G11205490