




1. Please remove the left side panel and remove all cables and wires from the motherboard



2. Please remove the 5 screws as shown

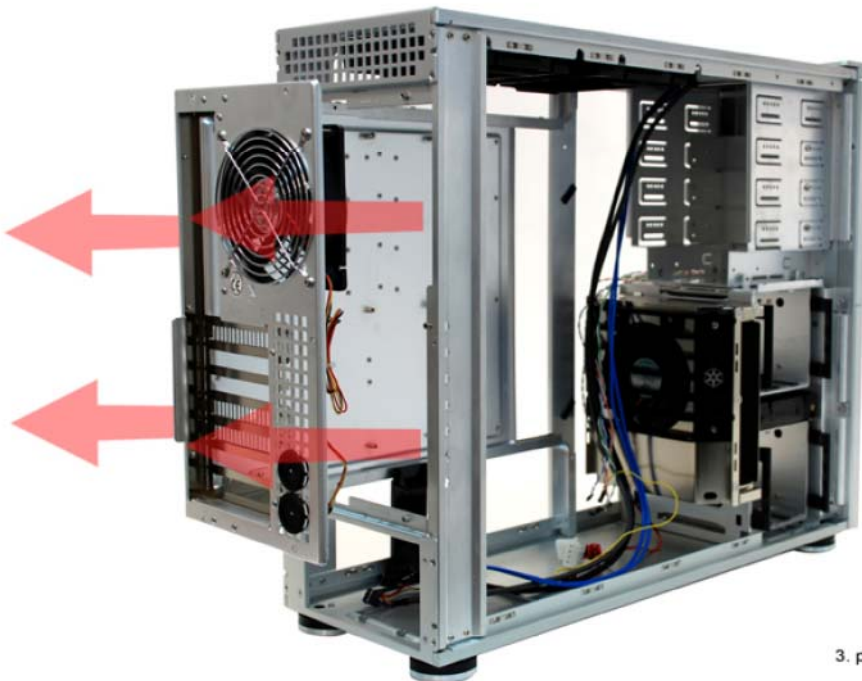


3. pull out the motherboard tray




4. Please remove the 12 screws as shown



5. Please remove the 4 screws as shown

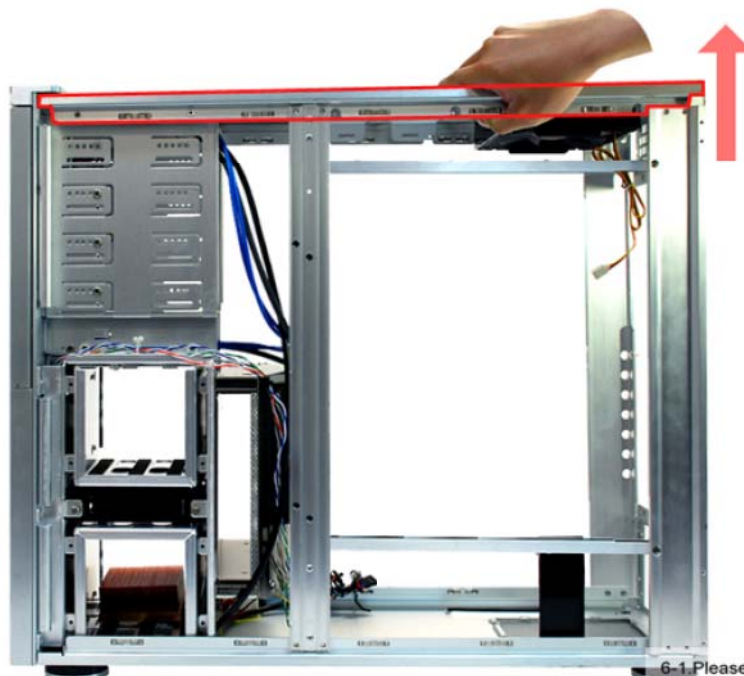

6-1. Please lift the top cover of TJ10

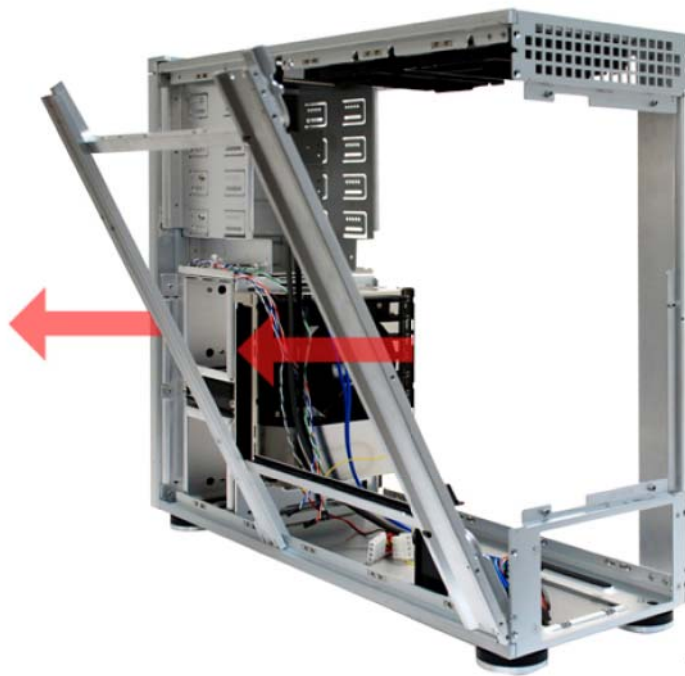


6-2.Remove the right support brace



7. Please remove the 6 screws as shown



8. Remove the graphics card support bracket

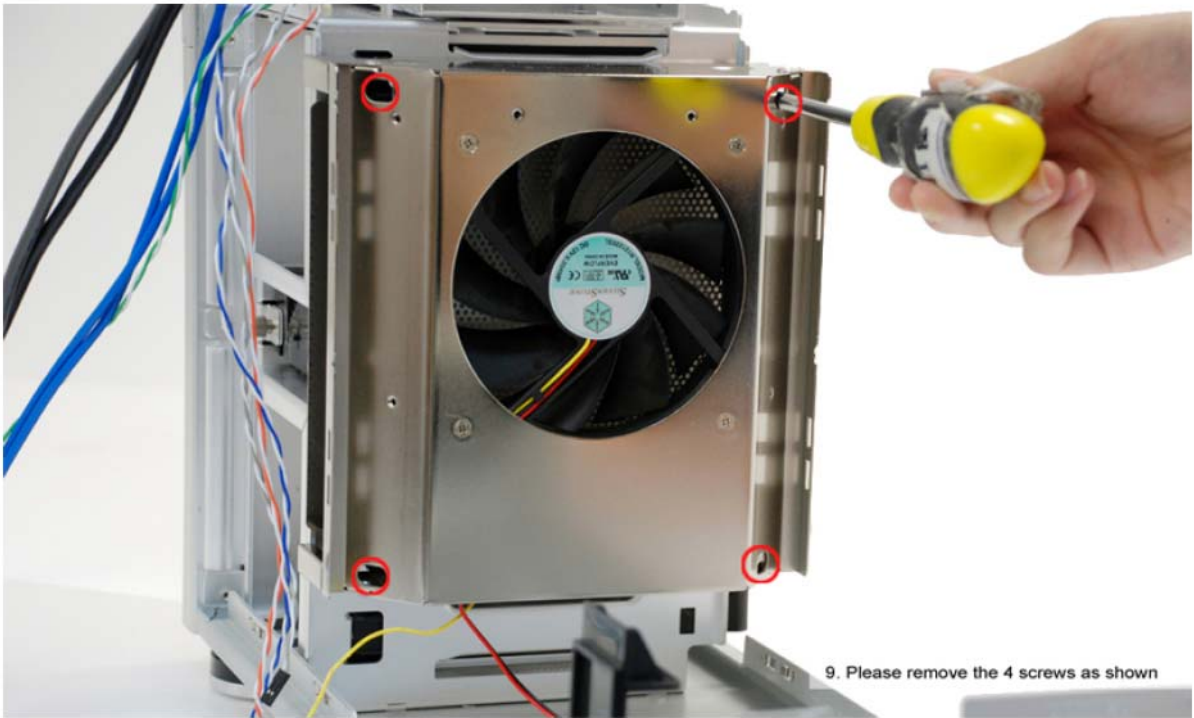

9. Please remove the 4 screws as shown



10. Remove the fan bracket from the case



11. Please remove the 2 screws from the top and the bottom as shown

