


(3) Graphics card / expansion card length limitation

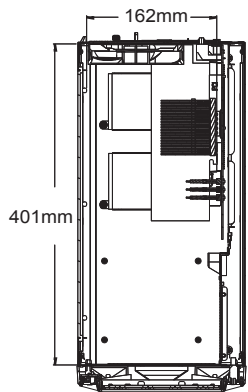

ENGLISH

PS14 can support 15.8" (401mm) long cards, which covers all retail consumer graphics cards available on the market

DEUTSCH

PS14 unterstützt Karten bis 15.8" (401mm). Dies deckt alle auf dem Markt verfügbare Consumer-Grafikkarten ab

FRANÇAIS

PS14 peut supporter des cartes de jusqu'à 15.8" (401mm) de long, ce qui couvre toutes les cartes graphiques disponibles actuellement sur le marché

ESPAÑOL

La PS14 puede aceptar tarjetas largas de 15.8" (401mm), lo que cubre todas las tarjetas gráficas para usuario disponibles en el mercado

ITALIANO

PS14 supporta schede lunghe 15.8" (401mm), coprendo tutte le schede grafiche consumer in vendita al dettaglio disponibili sul mercato

РУССКИЙ

Корпус PS14 позволяет устанавливать 15.8" (401mm) карты, что покрывает весь доступный рынок розничной продажи графических карт

繁體中文

PS14支援到PCI-E規格定義的上限15.8" (401mm)顯示卡, 市面上零售的消費及顯示卡應該都能安裝

簡體中文

PS14支持到PCI-E規格定義的上限15.8" (401mm)顯示卡, 市面上零售的消費及顯示卡應該都能安裝

日本語

PS14は15.8" (401mm)長のカードに対応します。これは市場に出回るリテール消費用グラフィックスカード全てを網羅します

한국어

PS14는 15.8" (401mm)의 긴 카드를 지원할 수 있으며, 이는 시중에 출시된 모든 소매 소비자용 그래픽 카드를 포함합니다

机箱和电源 有毒有害物质/元素及其化学含量表

部件名称	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
机壳(本体)	○	○	○	○	○	○
面板	○	○	○	○	○	○
风扇	×	○	○	○	○	○
USB线组	×	○	○	○	○	○
附件(零件包)	○	○	○	○	○	○
包材	○	○	○	○	○	○

本表格依据SJ/T 11364的规定编制。

○：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。

×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。

本表中有×的部件均符合欧盟RoHS指令的豁免项目，即欧盟第2011/65/EC号指令要求。



产品合格证

检验员: 检01
生产日期: 见产品条码

Warranty Information

This product has a limited 1 year warranty in North America and Australia.

For information on warranty periods in other regions, please contact your reseller or SilverStone authorized distributor.

Warranty terms & conditions

- Product component defects or damages resulted from defective production is covered under warranty. Defects or damages with the following conditions will be fixed or replaced under SilverStone Technology's jurisdiction.
 - Usage in accordance with instructions provided in this manual, with no misuse, overuse, or other inappropriate actions.
 - Damage not caused by natural disaster (thunder, fire, earthquake, flood, salt, wind, insect, animals, etc...)
 - Product is not disassembled, modified, or fixed. Components not disassembled or replaced.
 - Warranty mark/stickers are not removed or broken.
 Loss or damages resulted from conditions other than ones listed above are not covered under warranty.
- Under warranty, SilverStone Technology's maximum liability is limited to the current market value for the product (depreciated value, excluding shipping, handling, and other fees). SilverStone Technology is not responsible for other damages or loss associated with the use of product.
- Under warranty, SilverStone Technology is obligated to repair or replace its defective products. Under no circumstances will SilverStone Technology be liable for damages in connection with the sale, purchase, or use including but not limited to loss of data, loss of business, loss of profits, loss of use of the product or incidental or consequential damage whether or not foreseeable and whether or not based on breach of warranty, contract or negligence, even if SilverStone Technology has been advised of the possibility of such damages.
- Warranty covers only the original purchaser through authorized SilverStone distributors and resellers and is not transferable to a second hand purchaser.
- You must provide sales receipt or invoice with clear indication of purchase date to determine warranty eligibility.
- If a problem develops during the warranty period, please contact your retailer/reseller/SilverStone authorized distributors or SilverStone <http://www.silverstonetek.com>. Please note that: (i) You must provide proof of original purchase of the product by a dated itemized receipt; (ii) You shall bear the cost of shipping (or otherwise transporting) the product to SilverStone authorized distributors; SilverStone authorized distributors will bear the cost of shipping (or otherwise transporting) the product back to you after completing the warranty service; (iii) Before you send the product, you must be issued a Return Merchandise Authorization ("RMA") number from SilverStone. Updated warranty information will be posted on SilverStone's official website. Please visit <http://www.silverstonetek.com> for the latest updates.

Additional info & contacts

For North America (usasupport@silverstonetek.com)

SilverStone Technology in North America may repair or replace defective product with refurbished product that is not new but has been functionally tested. Replacement product will be warranted for remainder of the warranty period or thirty days, whichever is longer. All products should be sent back to the place of purchase if it is within 30 days of purchase, after 30 days, customers need to initiate RMA procedure with SilverStone Technology in USA by first downloading the "USA RMA form for end-users" form from the below link and follow its instructions. <http://silverstonetek.com/contactus.php>

For Australia only (support@silverstonetek.com)

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Please refer to above "Warranty terms & conditions" for further warranty details. SilverStone Technology Co., Ltd. 12F No. 168 Jiankang Rd., Zhonghe Dist., New Taipei City 235 Taiwan R.O.C. + 886-2-8228-1238 (standard international call charges apply)

For Europe (support.eu@silverstonetek.de)

For all other regions (support@silverstonetek.com)

NO: G11229490



SILVERSTONE[®]
Designing Inspiration

PRECISION SERIES

Affordable, simple ATX chassis with separate cooling zones


PS14

Super clean internal look with PSU and drive bay cover

Motherboard back plate opening for quick CPU cooler assembly

All black painted interior for stylish look

Supports graphics cards up to 15.8" (401mm)

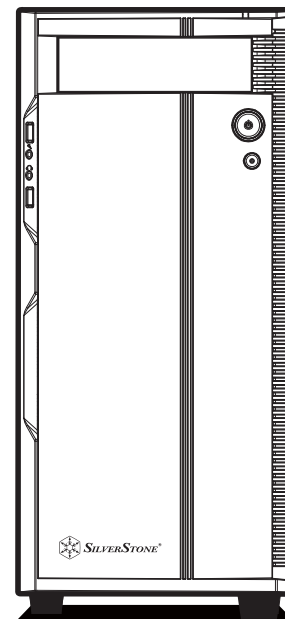

www.silverstonetek.com

Introduction

Aimed at users with demand for an affordable ATX tower chassis with clean interior and separate cooling zones, SilverStone created the Precision Series PS14. Despite the humble entry-level mission, PS14's design features closely match those in the mainstream high-end chassis. PSU and drive bay areas have covers to clearly section off individual components inside for separate cooling zones with smooth air flow while also letting users hide cables for pristine look on the interior.


A full array of features like USB 3.0, removable fan filter, all black painted interior and CPU back plate cutout are all standard in this great chassis.

Specifications

Model No.	SST-PS14B		
Material	Plastic panel, steel body		
Motherboard	ATX (up to 12" x 10.2") , Micro-ATX		
Drive Bay	External	5.25" x 1 or 2.5" x 2	
	Internal	3.5" x 2 (compatible with 2.5"), 2.5" x 2	
Cooling System	Front	120 / 140mm fan slot x 2, 80mm fan slot x 1	
	Rear	120mm fan x 1	
Radiator Support	Front	120mm x 2 / 140mm x 1 / 240mm x 1	
	Rear	120mm x 1	
Expansion Slot	7		
Front I/O Port	USB 3.0 x 2, Audio x 1, MIC x 1		
Power Supply	Standard PS2 (ATX)		
Expansion Card	Support up to 15.8"(401mm), width restriction - 6.4"(162mm)		
CPU cooler Limit	165mm		
PSU Limit	220mm		
Net Weight	5.7 kg		
Dimension	210mm (W) x 465mm (H) x 454mm (D), 44.3 Liters		

5.25" Front Bay Device Installation

01



ENGLISH

Remove front panel as indicated in the diagram

DEUTSCH

Frontblende wie abgebildet entfernen

FRANÇAIS

Retirez le panneau frontal comme indiqué dans le diagramme

ESPAÑOL

Retire el panel frontal como se indica en el diagrama

ITALIANO

Rimuovere il pannello frontale come indicato nella figura

РУССКИЙ

Снимите лицевую панель, как показано на рисунке

繁體中文

請依圖示由面板正面取下擋版

簡體中文

请依图示由面板正面取下挡版


日本語

図示されるようにフロントパネルを取り外します

한국어

그림과 같이 전면 패널을 분리합니다

02



ENGLISH

- Slide 5.25" device from the outside into the bay until it locks into place
- Secure with screws from both side

DEUTSCH

- 5,25-Zoll-Gerät von außen in den Schacht schieben, bis es einrastet
- Mit Schrauben von beiden Seiten sichern

FRANÇAIS

- Insérez le périphérique 5,25" de l'extérieur dans la baie jusqu'à ce qu'il s'enclenche
- Fixez avec des vis de chaque côté

ESPAÑOL

- Deslice el dispositivo de 5,25" desde el exterior hacia la bahía hasta que encaje en su sitio
- Asegure con tornillos desde ambos lados

ITALIANO

- Far scorrere il dispositivo da 5,25" dall'esterno verso l'interno dell'alloggio finché si blocca in posizione
- Fissare con viti su entrambi i lati

РУССКИЙ

- Установите 5,25-дюймовое устройство в отсек до его фиксации
- Закрепите винтами с обеих сторон

繁體中文

- 直接將5.25"裝置推入到定位後會自動鎖上
- 於兩側鎖上螺絲固定

簡體中文

- 直接将5.25"装置推入到定位后会自动锁上
- 于两侧锁上螺丝固定

日本語


- 5.25"デバイスを外側からスライドさせて固定されるまでベイに入れます。
- ネジで両側を固定します

한국어

- 5.25"장치를 제자리에 고정될 때까지 바깥쪽에서 베이로 밀어 넣습니다.
- 양쪽 나사로 고정합니다

2.5"/3.5" Disk Device Installation

03



ENGLISH

Install and secure the 2.5" / 3.5" hard drive onto the hard drive bracket

DEUTSCH

Installieren und fixieren Sie die 2,5 / 3,5 Zoll-Festplatte in der Festplattenhalterung

FRANÇAIS

Installez et fixez le disque dur de 2,5" / 3,5" sur la console du disque dur

ESPAÑOL

Instale y fije el disco duro de 2,5" / 3,5" al bracket para discos duros

ITALIANO

Installare e fissare il disco rigido da 2,5" / 3,5" al relativo supporto

РУССКИЙ

Установите на кронштейн и закрепите 2,5 / 3,5-дюймовый жесткий диск

繁體中文

將2.5" / 3.5"硬盤安裝至硬碟架

簡體中文

將2.5" / 3.5"硬盤安裝至硬碟架

日本語

2.5" / 3.5"ハードディスクドライブをハードディスク・ブラケットにインストールして固定します


한국어

2.5" / 3.5" 드라이브를 하드 드라이브 브래킷에 장착하고 고정합니다

Component size limitations

The PS14 was designed to accommodate oversized components, but we still recommend referring to the following dimension guidelines:

(1) CPU Cooler limitation

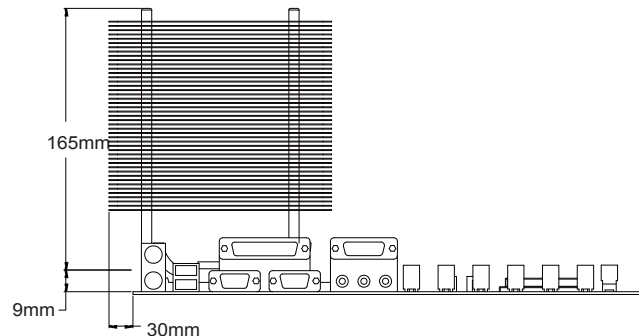

ENGLISH

Height limitation for CPU cooler is 165mm with 30mm clearance over the motherboard's top edge

DEUTSCH

Höhenbeschränkung für CPU-Kühler 165 mm mit einem Freiraum von 30 mm oberhalb der Motherboard-Oberkante

FRANÇAIS

La limitation de hauteur des refroidisseurs de processeurs est 165mm avec un espace de 30mm au-dessus du bord supérieur de la carte mere

ESPAÑOL

La limitación de altura para disipadores de CPU es de 165mm con un espacio libre de 30mm sobre el borde superior de la placa base

ITALIANO

La limitazione dell'altezza del dissipatore di calore CPU è di 165 millimetri con uno spazio libero di 30mm sopra il bordo superiore della scheda madre

РУССКИЙ

Ограничение по высоте для системы охлаждения процессора составляет 165 мм с 30-мм зазором над верхним краем системной платы

繁體中文

Cooler限高是165mm, Cooler外源允許超出主機板上邊界30mm

簡體中文

Cooler限高是165mm, Cooler外源允許超出主板上邊界30mm


日本語

CPUクーラーの高さ限度は、マザーボード上側の余裕30mmを取って、165mmです

한국어

CPU 쿨러의 높이 제한은 165mm로서 메인보드 상단 가장자리 위로의 허용 오차가 30mm입니다

(2) Power supply limitation

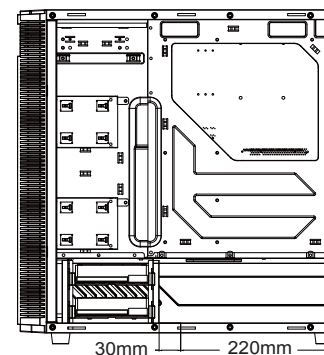

ENGLISH

The PS14 supports power supply with depth of up to 220mm

DEUTSCH

Das PS14 unterstützt Netzteile mit einer Tiefe von bis zu 220 mm

FRANÇAIS

Le PS14 est compatible avec les alimentations d'une profondeur inférieure ou égale à 220mm

ESPAÑOL

La PS14 acepta fuentes de alimentación con una profundidad de hasta 220mm

ITALIANO

PS14 supporta alimentatori con profondità fino a 220mm

РУССКИЙ

Корпус PS14 допускает установку блока питания глубиной до 220 мм

繁體中文

PS14可支援至長度220mm的PSU

簡體中文

PS14可支援至長度220mm的PSU

日本語

PS14は最高220mmの奥行きの電源をサポートします

한국어

PS14은 220mm의 깊이를 갖는 파워 서플라이까지 지원합니다