





SST-RM224 Backplane explanation

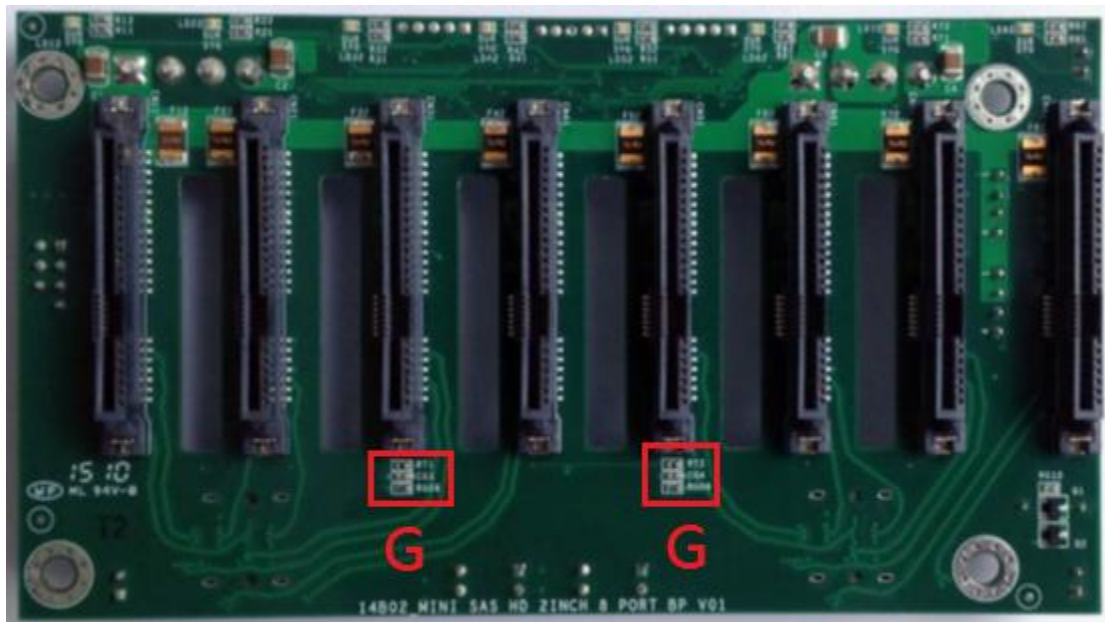

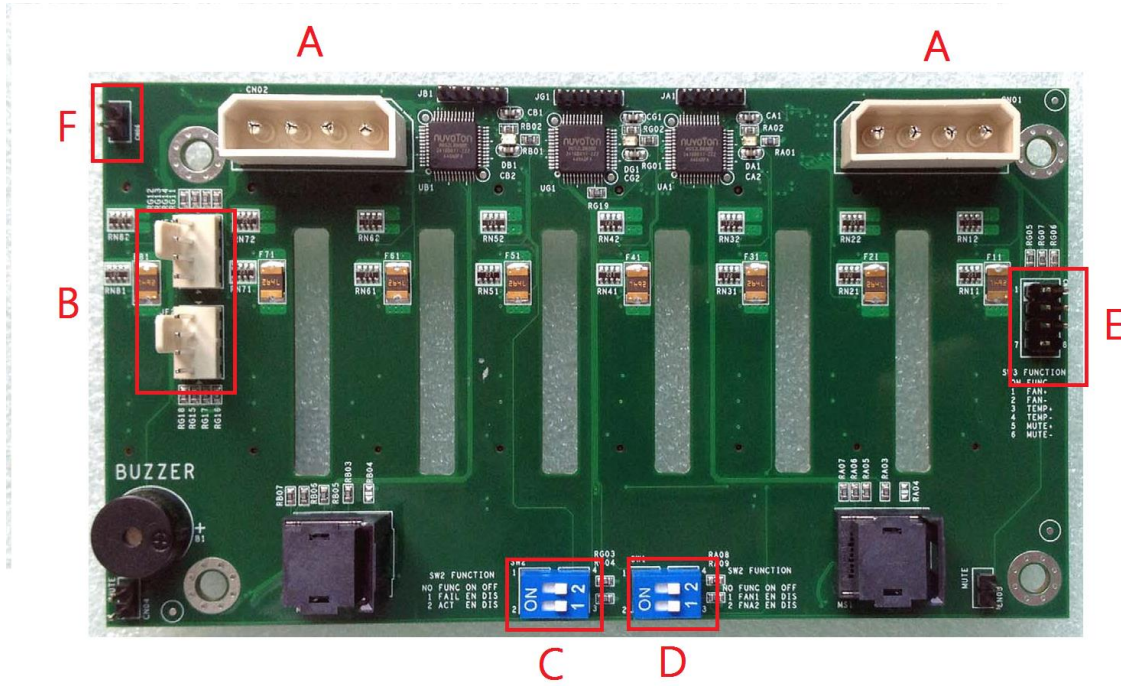

Specification

NO	specification
A	Molex 4-Pin female power connector
B	Fan 1(Top) and Fan 2(Down) ,4-Pin connector (A) RPM = 30% = lower then 25°C (B) RPM = 100% = 45°C(55°C)
C	 ON 1 2 SGPIO function fail indicator ON: Enable(Green Led) OFF: Disable (Red Led)
D	 ON 1 2 Fan controller ON: Enable OFF: Disable
E	 Pin 1 : FAN+ Pin 2 : FAN- Pin 3 : TEMP+ Pin 4 : TEMP- Pin 5 : MUTE+ Pin 6 : MUTE- Pin 7 : NON FUNCTION
F	Temperature Setting No jumper: Setting in 45°C(Default) Jumper included: Setting in 55°C
G	Temperature Censor Setting in 45°C →48°C Alert →44°C Stop Alert Setting in 55°C →58°C Alert →54°C Stop Alert
Note1:HDD POWER / ACCESS / FAIL LED (A) HDD INSERT → ACTIVE (GREEN) (B) HDD R/W→FLASH (GREEN) (C) HDD FAIL → ACTIVE (RED)	
Note 2:ALARM BUZZER (A) FAN FAIL →B---B---B---B (B) TEMPERATURE FAIL →BB---BB---BB---BB	

