



**SILVERSTONE**<sup>®</sup>  
Designing Inspiration

# 2.4GHz wireless computer power and reset remote switch

## ES02-USB




Control your computer from anywhere in the room using 2.4GHz RF remote  
2.4GHz receiver utilizing universal USB 9 pin male connector  
Works as far away as twenty meter  
Includes power / reset switch Y cable  
Includes left and right angled USB adapters

*Includes power / reset switch Y cable*

### Specifications

Model No.	SST-ES02-USB
<b>Adapter card</b>	
Adapter form factor	USB 2.0 9 pin male connector x 1
Operation frequency	2.4GHz
EIRP	3.76dBm (Measured max)
Operating range	20 meter (Free space)
Environment	Operating temperature: 0°C ~ 40°C (32°F ~ 104°F) Storage temperature: -40°C ~ 70°C (-40°F ~ 158°F) Operating humidity: 10% ~ 90% non-condensing Storage humidity: 5% ~ 90% non-condensing
Net Weight	30g
Dimension	30mm (W) x 10mm (H) x 60mm (D)

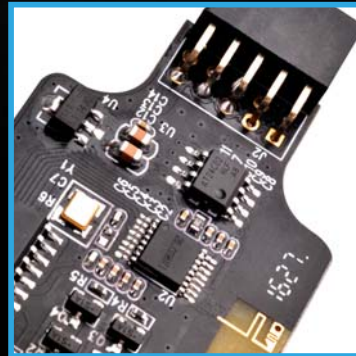

<b>Remote control</b>	
Operation frequency	2.4GHz
EIRP	3.76dBm (Measured max)
Operating range	20 meter (Free space)
Battery type	CR2032 (Lithium manganese button battery)
Nominal voltage	DC 3.0V
Battery environment	Operating temperature: -20°C ~ 70°C (-4°F ~ 158°F) Storage temperature: 10°C ~ 40°C (50°F ~ 104°F)

#### Taiwan Headquarters

12F., No.168, Jiankang Rd.,  
Zhonghe Dist., New Taipei City 235,  
Taiwan R.O.C.

Tel: + 886-2-8228-1238 / Fax: + 886-2-8228-7123

For sales and purchasing: sales@silverstonetek.com

#### USA

13626 Monte Vista Ave. Unit #A,  
Chino, CA 91710,  
USA

Tel: + 1-909-465-9596 / Fax: + 1-909-465-9569

For General Questions/Sales: usasales@silverstonetek.com

#### Europe

Brandstücken 27,  
D-22549 Hamburg,  
Germany

Tel: + 49-40-675931-0 / Fax: + 49-40-675931-66

For sales and purchasing: sales.eu@silverstonetek.de