



G11313530-RT

支援于 SilverStone Type-C / USB 3.1 Gen 2 机箱 USB 升级套件



- 支援 USB 3.1 Gen 2 标准可达 10 Gb/s 高速传输
- 支援 Type-C 正反插接头
- 支援银欣大多数机箱 (如规格表所列之完整型号)
- 扁平电缆易弯折, 增加使用灵活性

产品规格



型号	G11313530-RT
接头	内接 USB 20pin (Key A), 内接 USB 19pin, Audio
端口	Type-A + Type-C + Audio + MIC
界面	Type-A: USB 3.0, Type-C USB 3.1 Gen 2 (10 Gb/s), 向下兼容于 USB 3.0
线材长度	USB 3.0 线长 : 800mm USB 3.1 Gen 2 Type-C 线长 : 600mm Audio 线长 : 800mm
支援清单	CS380, CS381, DS380 FT03, FT03-MINI, FT04, FTZ01, FTZ01-E GD04, GD05, GD06, GD07, GD08 KL04 LD03 ML03, ML04, ML07 PS08, PS09, PS10, PS12, PS14 RL04, RL05 RV04, RVZ01, RVZ01-E, RVZ03 SG05, SG05-Lite, SG07, SG08, SG08-LITE, SG11, SG13 TJ04-E 只能接到 PCIe 扩充卡 (ECU02), 无法接上主板 FT02, RV02 线材不够长 FT05, RV03, RV05 看起来排列组合一样, 但是不兼容 GD09, GD10, PS07, PS14-E, PS15, PS16, SG09, SG10, SG12, TJ08-E, ML05, ML06, ML06-E, ML09, RL08
尺寸	75mm (W) x 28mm (H) x 13mm (D)

Remark

* According to USB 3.1 standard, to achieve USB 3.1 Gen2 speed, the combined external and internal cable length cannot exceed 1000mm. Since G11313530-RT's internal Type C cable is already 600mm, the external connector must be less than 400mm to maintain full speed.

新世代的速度

最高可达 10 Gb/s 高速传输

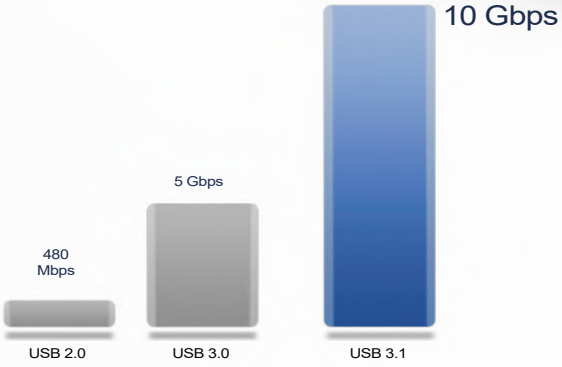

接头轻松连

Type-C 正反插接头，轻松连接周边装置

便利扁排线

扁平电缆易弯折，增加安装灵活性