



SILVERSTONE

SX700




标准SFX电源之新典范

700W

产品规格

型号	SST-SX700-PT				
最大DC供电	700W				
负载范围	+3.3V	+5V	+12V	+5VSB	-12V
最大电流 (安培数)	22A	22A	58.4A	2.5A	0.3A
总+3.3V & +5V 输出	110W				
总+12V输出	700W				
输入电压	90 ~ 264 Vrms				
效率	20% ~ 100% 负载时可达87% ~ 90%				
平均故障间隔	100,000 小时				
接头	1 x 24 / 20-Pin 主板接头(300mm) 1 x 8 / 4-Pin EPS / ATX 12V 接头(400mm) 1 x 8 / 4-Pin EPS / ATX 12V 接头 (550mm) 2 x 8 / 6-Pin PCIE 接头 (400mm / 150mm) 2 x 8 / 6-Pin PCIE 接头 (550mm / 150mm) 6 x SATA 接头 ("300mm / 220mm / 100mm" x 2) 3 x 4-Pin Peripheral 接头 (300mm / 200mm / 200mm) 1 x 4-Pin软盘驱动器 接头 (100mm)				
冷却系统	单92mm FDB 风扇				
尺寸规格	SFX				
认证	80 PLUS Platinum				
重量	0.96 Kg				
尺寸	125 mm (宽) × 63.5 mm (高) × 100 mm (深)				

产品特色

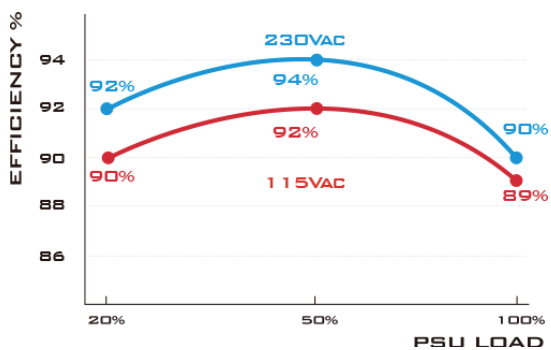

高效率表现的 80 PLUS白金牌认证



80 PLUS白金牌认证的超高效率设计，有效节省电费与废热的产生




强大单组+12V输出设计

强大单组+12V输出设计

强大单组+12V输出设计，满足高阶系统与超频使用对+12V的大量需求

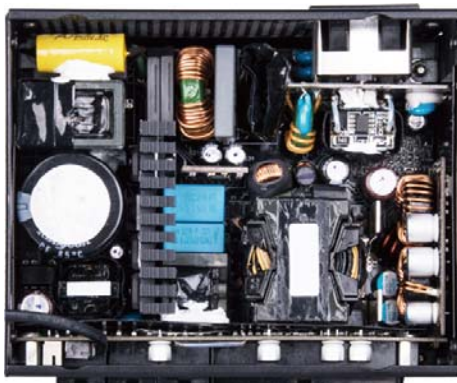

全日系电容

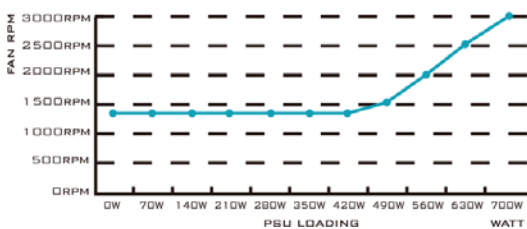


92mm FDB风扇

大风量、超静音的92mm FDB风扇设计，确保工作环境的宁静舒适性

产品特色



8 / 4-Pin EPS / ATX 12V connector x 2



全模块化线材设计

全模块化线材设计，方便小型机箱的理线

±5%




±3%



高稳定±3%电压稳定

高稳定±3%电压稳定与超低波纹与噪声设计



银欣的扁平电缆

银欣的扁平电缆设计，可轻易折弯，更有助于理线



标准SFX电源尺寸规格

125 mm (宽) x 63.5 mm (高) x 100 mm (深)